RESISTOR CHIP OUTRIGGER 1.75 W





DATA SHEET PART SERIES: CRH0610XXXXF

SHEET 1 OF 3 Dwg 1015345 EN 16-0560 Revision A

FEATURES

APPLICATIONS

Wide Band Operation Broadcast


High PowerHigh Power FiltersCoplanar Waveguide CompatibleHigh Power Amplifiers

Low Capacitance Isolators
Easy Installation Military

Wide Resistance Range Instrumentation

GENERAL DESCRIPTION

EMC Technology offers the widest selection of chip resistors worldwide. Chip components are offered in both thick and thin film resistive material and available in Alumina, Aluminium Nitride, Beryllium Oxide and CVD Diamond. CRH series feature EMC Technology's patented outrigger resistor technology (US 8, 994, 490) to offer substantially improved power handling over conventional resistors without compromising broadband performance.

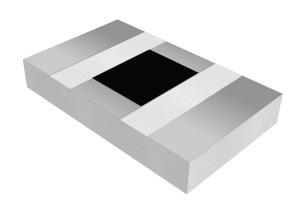

ORDERING INFORMATION

Part Identifier: CRH0610XXXXF

X = Tolerance (%)

XXX = ResistanceValue (Ω)

SPECIFICATIONS

1.0 ELECTRICAL

Frequency Range: DC - 27 GHzResistance Range: $10 - 500 \Omega$ Resistance Tolerance: $\pm 5\%$

Temperature Coefficient of Resistance: ± 200 PPM/ ℃ Max

Input Power CW: 1.75 Watt

Peak Power: 17.5W, 10µs pulse width, 1% duty cycle

2.0 ENVIRONMENTAL

Operating Temperature: -55°C to +150°C Non-operating Temperature: -65°C to +150°C

3.0 MARKING

Unit Marking: Dot Marking, OHMS Value

4.0 QUALITY ASSURANCE

Visual and Mechanical Inspection: Per 824W107

DC Resistance Check: 100% DC Resistance Check

Data Retention: Standard

5.0 PACKAGING

Standard Packaging: Tape and Reel

smiths microwave

Cage Codes: 24602 / 2Y194

www.emc-rflabs.com • +1 772-286-9300

AS 9100, ISO 9001 and 14001 Certified

RESISTOR CHIP OUTRIGGER 1.75 W





DATA SHEET PART SERIES: CRH0610XXXXF


SHEET 2 OF 3 Dwg 1015345 EN 16-0560 Revision A


6.0 MECHANICAL


Substrate Material: Alumina, 96% Resistive Film: Thick Film


Terminal Material: Thick Film, Silver Plated

Metric Dimensions: Provided for reference only

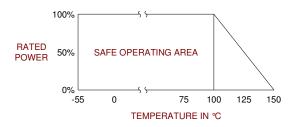

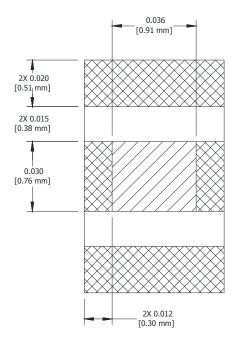

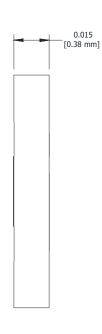

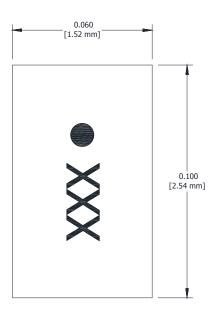

Note: Specifications are subject to change.

Unless Otherwise Specified: TOLERANCE: $X.XX = \pm 0.01$ $X.XXX = \pm 0.005$

Form 423F140 Rev -

Specifications are Subject to Change Without Notice

RESISTOR CHIP OUTRIGGER 1.75 W






DATA SHEET PART SERIES: CRH0610XXXXF

SHEET 3 OF 3 Dwg 1015345 EN 16-0560 Revision A

7.0 SUGGESTED MOUNTING FOOTPRINT

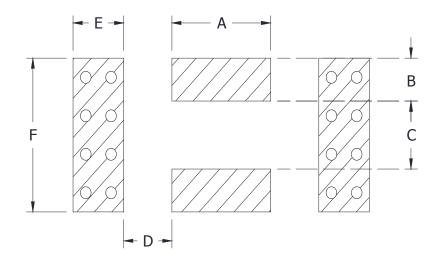

	DIMENSION												
Ì	INCHES						METRIC (mm)						
ĺ	Α	В	С	D	Е	F	Α	В	С	D	Е	F	
Ì	0.035	0.014	0.036	0.015	0.025	0.065	0.889	0.356	0.914	0.381	0.635	01.651	