

# ATTENUATOR TAB & COVER 20 WATT



DATA SHEET

PART SERIES: 83-3001TC-XX.XX

SHEET 1 OF 2  
Dwg 1013255

EN 14-0826  
Revision -

## FEATURES

- Tab Launch
- High Power
- Excellent Heat Transfer
- Low VSWR
- Easy Installation
- Wide Attenuation Offering

## APPLICATIONS

- Mobile Networks
- Broadcast
- High Power Amplifiers
- Isolators
- Military
- Instrumentation

## GENERAL DESCRIPTION


EMC Technology offers the widest selection of flangeless attenuators worldwide. Tab and cover components offer the highest performance of any style of attenuator component.

## ORDERING INFORMATION

Part Identifier:

83-3001TC-XX.XX

Attenuation Value

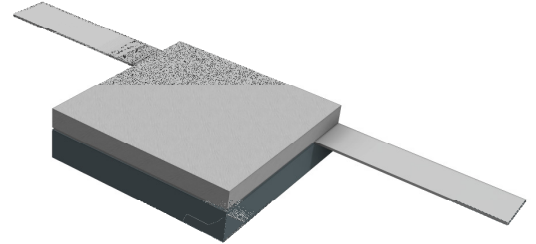

## SPECIFICATIONS

### 1.0 ELECTRICAL

Nominal Impedance:	50 ohms
Frequency Range:	DC - 4.0 GHz
Attenuation Values Available:	1 through 10 dB in 1 dB increments
Attenuation Accuracy:	1 through 10 dB $\pm$ 0.5 dB
Input Power CW:	20 watts @ 100°C heat sink, derated linearly to zero power at 150°C
Peak Power:	200 Watts (based on 10us pulse width and 1% duty cycle)
VSWR:	1.50:1 Max

### 2.0 ENVIRONMENTAL

Operating Temperature:	-55°C to +150°C
Non-operating Temperature:	-65°C to +150°C
Temperature Coefficient:	+/-200 PPM / °C max

### 3.0 MARKING

Unit Marking:	Logo and Part Number; legibility and permanency per MIL-STD-130
---------------	---

### 4.0 QUALITY ASSURANCE

Sample Inspect Per MIL-STD-105, Level II, 1.0% AQL.  
Visual and Mechanical Examination for Conformance To Outline Drawing Requirements.  
Measure Attenuation and VSWR  
Data Retention – Standard

### 5.0 PACKAGING

Standard Packaging:	Tray
---------------------	------

# ATTENUATOR TAB & COVER 20 WATT



DATA SHEET




PART SERIES: 83-3001TC-XX.XX

SHEET 2 OF 2  
Dwg 1013255

EN 14-0826  
Revision -

## 6.0 MECHANICAL

Substrate Material:	Beryllium Oxide
Resistive Film:	Thin Film
Cover Material:	Alumina
Tab Material:	Beryllium Copper
Tab Finish:	Tin/Lead
Metric Dimensions:	Provided for reference only

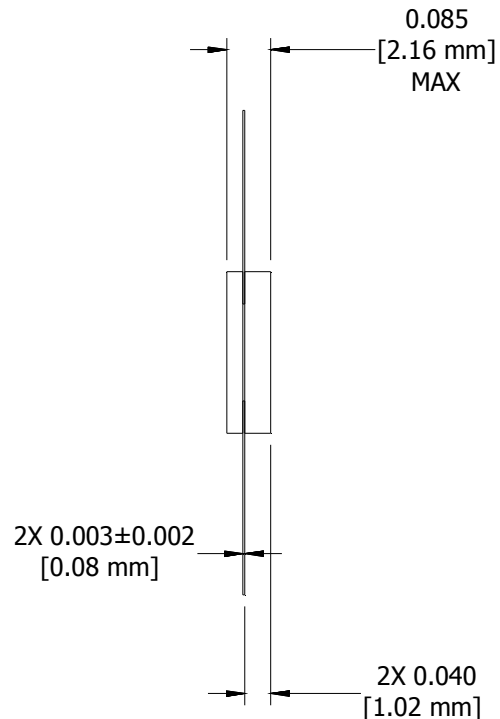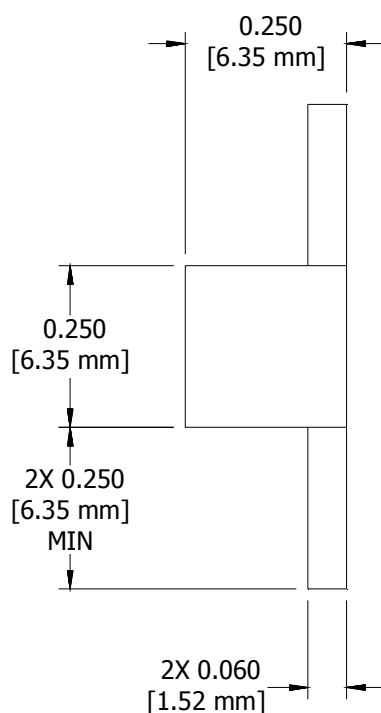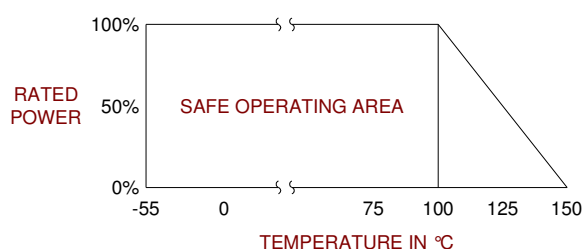

Unless Otherwise Specified: TOLERANCE: X.XX =  $\pm 0.02$  X.XXX =  $\pm 0.010$