

ATTENUATOR CHIP 2 WATT



DATA SHEET

PART SERIES: TS07XXF

SHEET 1 OF 2
Dwg 1012105

EN 16-0703
Revision A

FEATURES

- Small Footprint
- High Power
- Surface Mount
- Low VSWR
- Easy Installation
- Wide Attenuation Offering

APPLICATIONS

- Mobile Networks
- Broadcast
- High Power Amplifiers
- Isolators/Circulators
- Military
- Instrumentation



GENERAL DESCRIPTION

EMC Technology offers the widest selection of chip attenuators worldwide. Chip components are offered in Alumina, Aluminum Nitride, Beryllium Oxide, and CVD diamond for maximum performance.

ORDERING INFORMATION

Part Identifier: TS07XXF
(XX) – dB Value

SPECIFICATIONS

1.0 ELECTRICAL

Nominal Impedance:	50 ohms
Frequency Range:	DC – 6 GHz
Attenuation Values Available:	0 – 10 in 1 dB increments
Attenuation Accuracy:	±0.5 dB
Input Power CW:	100 Milliwatts full rated power to 125°C, derated linearly to 0 watts at 150°C.
VSWR:	DC – 6 GHz - 1.50:1

2.0 ENVIRONMENTAL

Operating Temperature:	-55°C to +150°C
------------------------	-----------------

3.0 MARKING

Unit Marking:	“dB Value” and Orientation Line
---------------	---------------------------------

4.0 QUALITY ASSURANCE

Sample Inspect Per MIL-STD-105, Level II, 1.0% AQL

Visual and Mechanical Inspection for Conformance to Outline Drawing

Measure Attenuation and VSWR

Data Retention - Standard

5.0 PACKAGING

Standard Packaging:	Tape and Reel
---------------------	---------------

ATTENUATOR CHIP 2 WATT




DATA SHEET PART SERIES: TS07XXF

SHEET 2 OF 2
Dwg 1012105

EN 16-0703
Revision A

6.0 MECHANICAL

Resistive Film: Thick Film
Terminal Material: Thick Film, RoHS Compliant
Metric Dimensions: Provided for reference only
Workmanship: PER MIL-R-55342

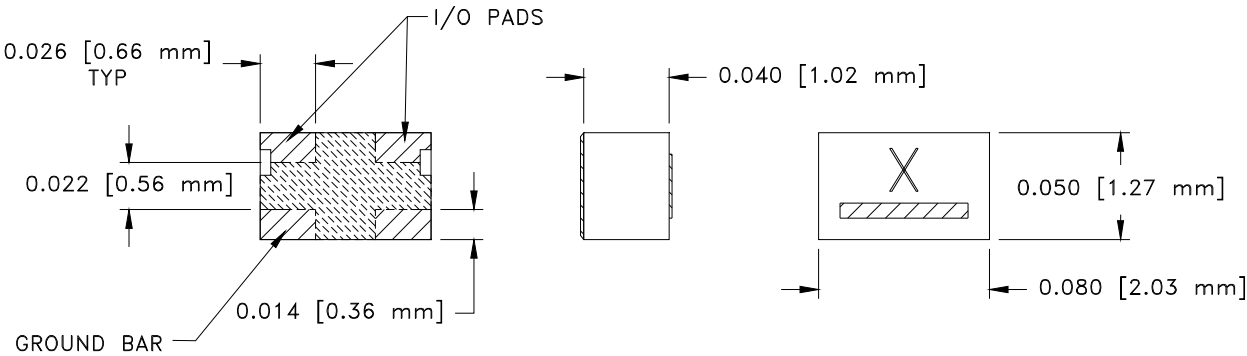

Unless Otherwise Specified: TOLERANCE: X.XXX = ± 0.005

7.0 SUGGESTED MOUNTING FOOTPRINT

Part Number	Inches							mm						
	A	B	C	D	S	S2	W	A	B	C	D	S	S2	W
TS07XX	0.027	0.018	0.032	0.028	0.028	0.013	0.080	0.69	0.46	0.81	0.71	0.71	0.33	2.03

